


# FACE LIT LETTER (L.E.D.) W/ WALLBUSTER CONN.

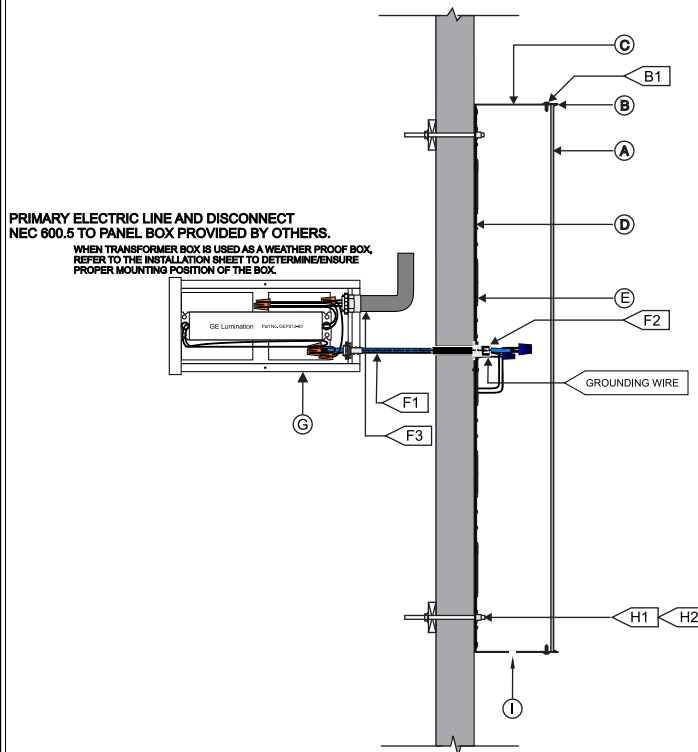

<b>(A) FACE</b>	
MATERIAL:	3/16" ACRYLIC
<b>(B) TRIMCAP</b>	
SIZE	1"
B1	#8 PHILLIPS HEAD SCREWS
<b>(C) RETURNS</b>	
DEPTH:	5"
MATERIAL:	.040" ALUM.
<b>(D) BACKS:</b>	
MATERIAL:	.050" ALUMINUM UP TO 48" LETTERS/ .063" LETTERS OVER 48"
<b>(E) ILLUMINATION</b>	
TYPE:	L.E.D. (BRANDS VARY)
<b>(F) WIRING</b>	
F1	UL APPROVED CLASS II PLTC LOW VOLTAGE WIRE
F2	3/8" WALLBUSTER CONNECTOR
F3	PRIMARY ELECTRICAL SERVICE W/DEDICATED CIRCUIT PROVIDED BY OTHERS
<b>(G) POWER SUPPLY</b>	
TYPE:	REMOTE LED POWER SUPPLY WEATHER-PROOF BOX
VOLTAGE:	120V
<b>(H) MOUNTING</b>	
H1	10/24 NUTSERT
H2	10/24 ALL-THREAD, NUTS & WASHERS / OR TYPE AS REQ'D.
<b>(I) WEEP HOLES</b>	
	1/4" DRAIN HOLES FOR EXTERIOR LETTERS

**MECHANICAL INSTALLATION NOTE:** INSTALLER IS REQ'D. TO VERIFY ACTUAL FIELD CONDITIONS & PROVIDE NECESSARY MTG. HARDWARE & METHOD OF ATTACHMENT TO ENSURE SAFE INSTALLATION. INSTALLATION TO MEET N.E.C., UL & LOCAL CODES

**ELECTRICAL NOTE:** IT IS THE CUSTOMERS RESPONSIBILITY TO PROVIDE 120 VOLT PRIMARY ELECTRICAL SERVICE w/ DEDICATED CIRCUIT(S). INCLUDING GROUND WIRING DIRECTLY FROM PANEL BOX w/IN SIX (6) FEET OF SIGNAGE. INSTALLATION TO MEET N.E.C., UL & LOCAL CODES

**ELECTRICAL INSTALLATION NOTE:** THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE w/ THE REQUIREMENTS OF ARTICLE 600 OF THE N.E.C. AND/ OR OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN.

